



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>4</sup> : <b>H04N 5/782, 7/087</b>	<b>A1</b>	(11) International Publication Number: <b>WO 87/ 06416</b> (43) International Publication Date: 22 October 1987 (22.10.87)
-------------------------------------------------------------------------------------	-----------	-------------------------------------------------------------------------------------------------------------------------------

(21) International Application Number: PCT/GB87/00259  
 (22) International Filing Date: 16 April 1987 (16.04.87)  
 (31) Priority Application Number: 8609524  
 (32) Priority Date: 18 April 1986 (18.04.86)  
 (33) Priority Country: GB

(71) Applicant (for all designated States except US): BRITISH BROADCASTING CORPORATION [GB/GB];  
Broadcasting House, London W1A 1AA (GB).

(72) Inventor; and


(75) Inventor/Applicant (for US only) : SANDBANK,  
Charles, Peter [GB/GB]; 30 Beech Road, Reigate, Surrey (GB).

(74) Agent: PEARS, David, Ashley; Reddie & Grose, 16  
Theobalds Road, London WC1X 8PL (GB).

(81) Designated States: AT (European patent), BE (European patent), CH (European patent), DE (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent), US.

Published  
With international search report.

(54) Title: DEVICE FOR THE REMOTE CONTROL OF A VIDEORECORDER OR A VIDEORECEIVER

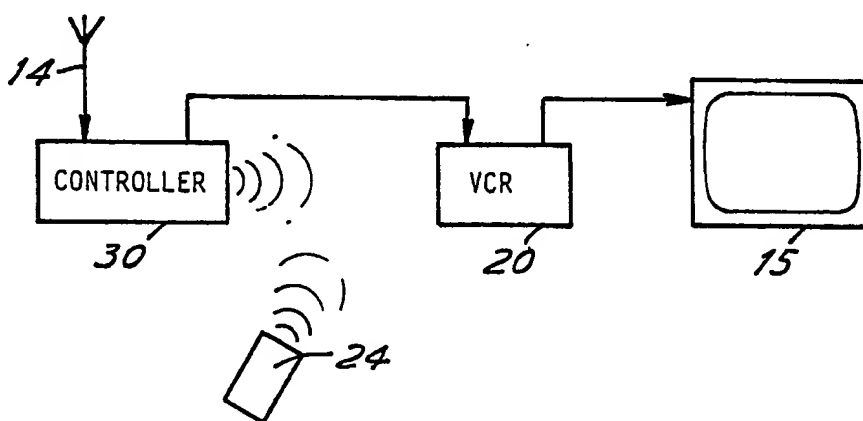

## (57) Abstract

A conventional video recorder (20) comprises electromechanical components, electronic circuits and a control unit with which there are associated both front panel controls and a user remote control unit with a sensor to which signals can be sent from a hand-held remote control unit (24). In addition to these conventional features an off-air remote controller (30) is provided. This is capable of decoding control signals associated with the television signal and includes an encoder which generates outputs which match those from the conventional user remote control unit (24).

***FOR THE PURPOSES OF INFORMATION ONLY***

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	FR	France	ML	Mali
AU	Australia	GA	Gabon	MR	Mauritania
BB	Barbados	GB	United Kingdom	MW	Malawi
BE	Belgium	HU	Hungary	NL	Netherlands
BG	Bulgaria	IT	Italy	NO	Norway
BJ	Benin	JP	Japan	RO	Romania
BR	Brazil	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	LI	Liechtenstein	SN	Senegal
CH	Switzerland	LK	Sri Lanka	SU	Soviet Union
CM	Cameroon	LU	Luxembourg	TD	Chad
DE	Germany, Federal Republic of	MC	Monaco	TG	Togo
DK	Denmark	MG	Madagascar	US	United States of America
FI	Finland				

Device for the remote control of a videorecorder  
or a videoreceiver.

The present invention relates to television receivers and video recorders, commonly known as video tape recorders (VTR) or video cassette recorders (VCR). The essential components of a video recorder are the electromechanical components including the tape drive mechanism, control relays and electromagnets, magnetic heads and head scanning mechanism. Secondly there are the electronic circuits for processing the video signals being recorded or played back. Thirdly there is the control unit which controls the electromechanical components and the electronic circuit. The control unit may be very simple or provided with many facilities for scheduled recording, various modes of replay and so on. In any event, some means of providing control inputs have to be provided and, at the simplest, these may consist solely of front panel controls. However, it is well known to provide domestic video recorders with remote control units which either plug into the recorder or transmit infrared or ultrasonic control signals to a sensor on the recorder.

Television receivers are also well known with remote control units as well as front panel controls.

In the professional field it is known to control recorders by transmitting control signals along with the wanted information signal. The recorder responds appropriately to the received control signals. See for example GB 2126002.

The object of the present invention is to make it possible to add such facilities to domestic receivers and video recorders, in particular as an add on facility for existing receivers and recorders.

Video recorders are known from EP 0 133985 and EP 0 122626 which have two remote control units. The first unit comprises a bar code reader responsive to television programme schedule data input by the user to enter such data in a programme memory. The second unit receives control signals accompanying the broadcast signal and compares these with the data in the programme memory to determine the times at which the video recorder is switched on and off. The first unit simply automates the programming of the video recorder.

- 2 -

The present invention provides a video recorder including electromechanical components, an electronic circuit and a control unit therefor, a remote control unit responsive to user input signals to provide control signals to the control unit and a second remote control unit responsive to received control signals accompanying a received television signal, to decode the received control signals and provide to the control unit control signals which match those provided by the first mentioned remote control unit.

The present invention also provides a television receiving apparatus including an electronic circuit and a control unit therefor, a remote control unit responsive to user input signals to provide control signals to the control unit and a second remote control unit responsive to received control signals accompanying a received television signal, to decode the received control signals and provide to the control unit control signals which match those provided by the first mentioned remote control unit.

In the present invention, the two remote control units can act independently as parallel, alternative means of control. Therefore the second unit can be provided as an add-on facility to an existing video recorder or receiver.

An embodiment of the invention will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 shows the main components of a video recorder,

Figure 2 is a diagram illustrating the physical set-up,

Figure 3 is a block diagram of an off-air remote controller,  
and

Figure 4 shows a known control signal format.

The video recorder shown in Figure 1 comprises the electromechanical components 10, the electronic circuits 11 and a control unit 12. The input to and output from the electronic circuit are symbolised by an aerial 14 and a television set 15. The control unit 12 is provided with conventional front panel controls 13.

The recorder is also provided with a conventional user remote control unit 16 which picks up signals directed on to an infrared sensor 17 by a hand held unit with buttons for effecting channel

- 3 -

selection, record, playback and so on. The video recorder as so far described represents conventional practice. The recorder according to the present invention is provided with an off-air remote control unit 18 which can provide exactly the same output signals to the main control unit 12 as are conventionally provided by the user remote control unit 16. The off-air remote control unit 18 derives its input via the electronic circuit 11 from the received television signal which is accompanied by data signals, for example signals conforming to the German VPS standards. Such VPS codes are sometimes transmitted in Germany with the broadcast signal to control the operation of recorders remotely. In Figure 1 the off-air unit 18 is shown feeding directly into the main control unit 12. However, in the preferred practice of the invention, the off-air unit is not built into the video recorder itself but is constructed as a separate controller which passes the control commands to the recorder using the input device on the recorder provided for the hand-held remote control unit. This has the advantage that no modification whatsoever to the recorder is required. If the recorder uses a hand-held unit connected by wire, the controller is plugged in in place of the hand-held unit. This has the disadvantage that the hand-held unit cannot be used when the controller is connected. This problem could be overcome by providing the controller with a plug incorporating a socket for the hand-held unit.

In the case of infra-red or ultrasonic remote control systems, the controller radiates control signals to the sensor 17, just like the hand-held unit, which can still be used in the normal.

The arrangement of a receiving installation using such a broadcast controller is shown in Figure 2. In this case, the aerial 14 and the television receiver 15 are connected to the recorder 20 in the conventional manner except that the aerial signal is 'looped through' the separate off-air controller 30. The television receiver 15, the recorder 20 and the hand-held remote control unit 24 can all be used in the normal way except when the off-air controller 30 responds to codes in the transmitted signal. The controller 30 could be made to respond to signals in the VPS format, but the transmission efficiency and convenience can be improved by

- 4 -

using teletext data signals for the control codes.

The main units of the off-air controller 30 are shown in Figure 3. Signals from the aerial 14 are buffered 31 to provide a 'loop-through' output 32 to the recorder 20 and to feed tuner and demodulator stages 33, 34 similar to those of a conventional television receiver. Teletext data signals corresponding to the available remote control functions are then extracted from the vertical blanking intervals of the signal by the data decoder 36 and re-encoded to produce infra-red (or ultrasonic) signals with the same coding format as those produced by the hand-held controller 24.

The structure of a suitable teletext data signal (known as Datacast) is shown in Figure 4. This consists of a two-level signal starting with Clock Run-In (CRI) and Framing Code (FC) data in the normal teletext format. Background detail for this system can be found in "BBC Datacast - The Transmission System" from the IERE Conference on Electronic Delivery of Data and Software, September 1986: IERE Conference Publication No. 69, pp.93-98.

The provision of a separate off-air remote control unit 18 makes it possible for the conventional, domestic video recorder to make use of the data signals because the unit 30 effectively decodes these signals and converts them to control signals simulating those from the user remote control unit 24. It accordingly becomes possible to switch the recorder on to record by remote control over the air, to select the channel being recorded, to terminate recording at the end of a program and so on.

The hand-held remote control unit 24 is usually dedicated to a particular application, that is to say it would emit only one set of control codes matching those for a corresponding video recorder (or television receiver). However the additional unit 30 could be capable of providing any one of a number of different sets of control signals and have a selector device for strapping the unit to provide the required set for a given application. Implementation could largely be in software terms with appropriate codes set up in ROM. Selection could be effected by plugging in different ROMs.

- 5 -

## CLAIMS:

1. A video recorder including electromechanical components, an electronic circuit and a main control unit therefor, a first remote control unit responsive to user input signals to provide control signals to the main control unit and a second remote control unit responsive to received control signals accompanying a received television signal, to decode the received control signals and provide to the main control unit control signals which match those provided by the first remote control unit.
2. A video recorder according to claim 1, comprising an input device for receiving the control signals from the first remote control unit, and wherein the control signals provided by the second remote control unit are fed to the said input device.
3. A video recorder according to claim 2, wherein the second remote control unit comprises a decoder for decoding the received control signals and an encoder for re-encoding the decoded signals as the control signals which match those provided by the first remote control unit.
4. A video recorder according to claim 3, wherein the encoder is an infra-red or ultrasonic encoder for radiating control signals to a sensor forming the said input device of the video recorder.
5. A video recorder according to any of claims 1 to 4, wherein the second remote control unit is capable of providing any one of a number of different sets of control signals and comprises a selector device for selecting one such set.
6. A video recorder according to claim 5, wherein the selector device comprises an interchangeable read-only memory device.
7. A controller for use with a video recorder having an input device for receiving control signals from a hand-held remote control

- 6 -

unit, comprising an aerial input, means for receiving and demodulating broadcast television signals, a decoder for decoding control signals in the demodulated signals, and an encoder for re-encoding the decoded signals in a form for controlling the video recorder by way of the said input device.

8. A controller according to claim 7, comprising a buffer amplifier and an output for looping out the signal on the aerial input to the video recorder.

9. A controller according to claim 7 or 8, wherein the encoder is an infra-red or ultrasonic encoder for radiating control signals to a sensor forming the said input device of the recorder.

10. A television receiving apparatus including an electronic circuit and a main control unit therefor, a first remote control unit responsive to user input signals to provide control signals to the control unit and a second remote control unit responsive to received control signals accompanying a received television signal, to decode the received control signals and provide to the main control unit control signals which match those provided by the first mentioned remote control unit.



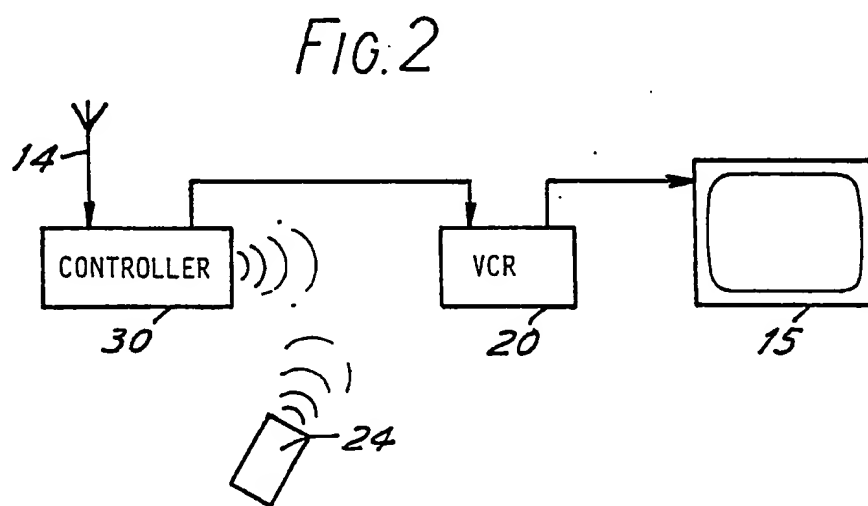
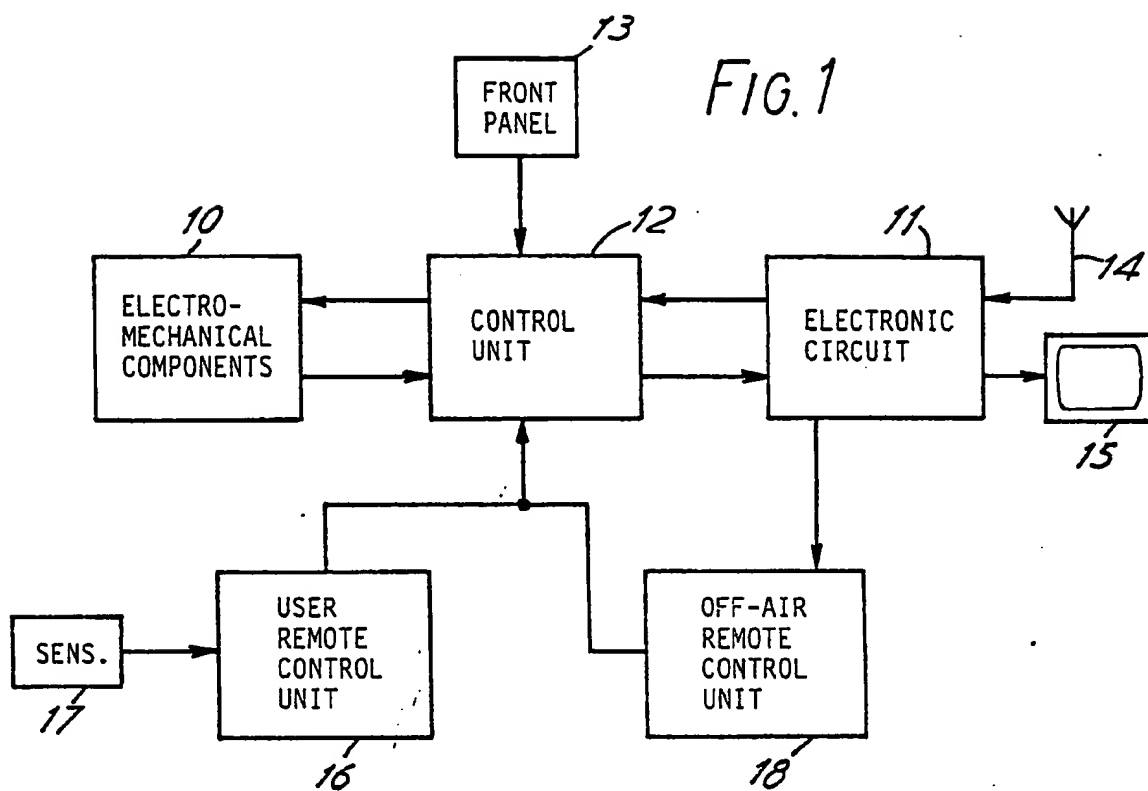


FIG. 3


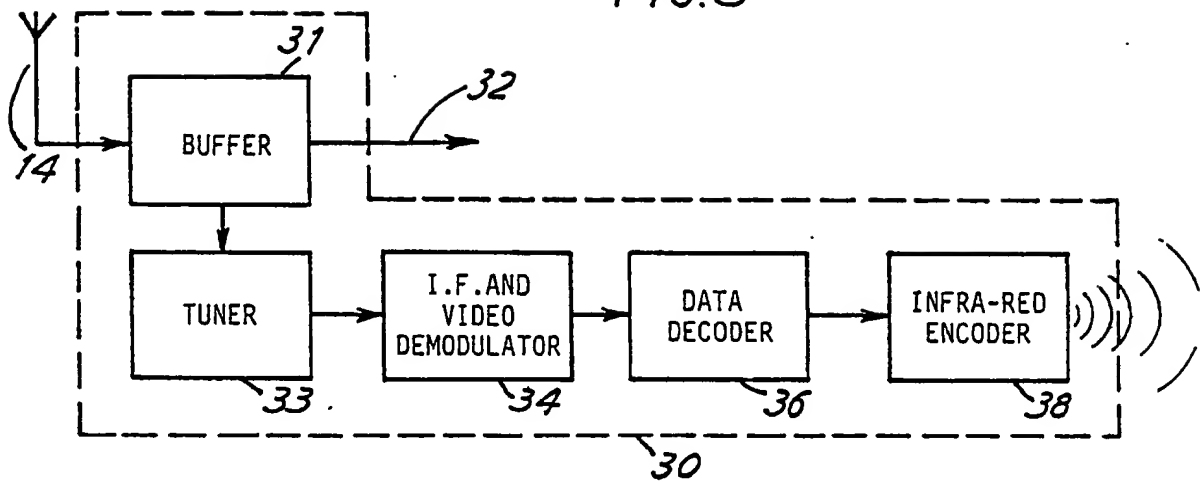



FIG. 4

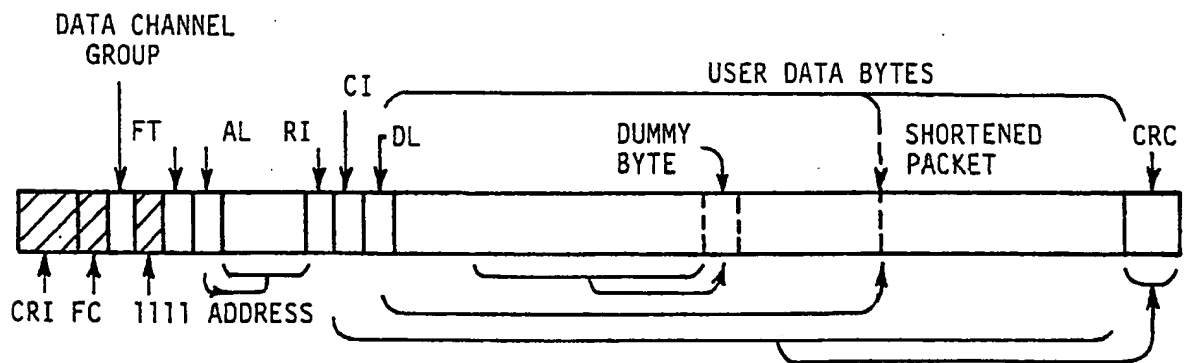

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 87/00259

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>6</sup>		
According to International Patent Classification (IPC) or to both National Classification and IPC		
IPC <sup>4</sup> :      H 04 N 5/782; H 04 N 7/087		
<b>II. FIELDS SEARCHED</b>		
Minimum Documentation Searched <sup>7</sup>		
Classification System	Classification Symbols	
IPC <sup>4</sup>	H 04 N; H 04 H; H 04 B	
Documentation Searched other than Minimum Documentation to the Extent that such Documents are Included in the Fields Searched <sup>8</sup>		
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>9</sup></b>		
Category <sup>9</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>
A	DE, A1, 3335082 (TELEFUNKEN FERNSEH UND RUNDfunk GmbH) 11 April 1985 see page 7, line 13 - page 10, line 16 --	1,2,10
A	Rundfunktechnische Mitteilungen, volume 26, no. 6, 1982, (Hamburg, DE), G. Hofmann et al.: "Videotext programmiert Videorecorder", pages 254-257 see the whole document --	1,2,10
A	Nachrichtentechnische Zeitschrift, volume 35, no. 6, June 1982, (Schwäbisch-Gmund, DE), H.E. Krüger: "Das digital Fernseh-kennnungssystem ZPS", pages 368-376 see the whole document -----	1,2,10
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p><sup>9</sup> Special categories of cited documents: <sup>10</sup></p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 45%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"A" document member of the same patent family</p> </div> </div>		
<b>IV. CERTIFICATION</b>		
Date of the Actual Completion of the International Search		Date of Mailing of this International Search Report
24th June 1987		27 JUL 1987
International Searching Authority		Signature of Authorized Officer
EUROPEAN PATENT OFFICE		M. VAN MOL 

ANNEX TO THE INTERNATIONAL SEARCH REPORT ON

INTERNATIONAL APPLICATION NO. PCT/GB 87/00259 (SA 16947)

This Annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 09/07/87

The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE-A- 3335082	11/04/85	DE-A,C 3337204	25/04/85

For more details about this annex :  
see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**